


# ELECTRO-OPTICAL TRANSDUCER BASED ON QUANTUM DOTS

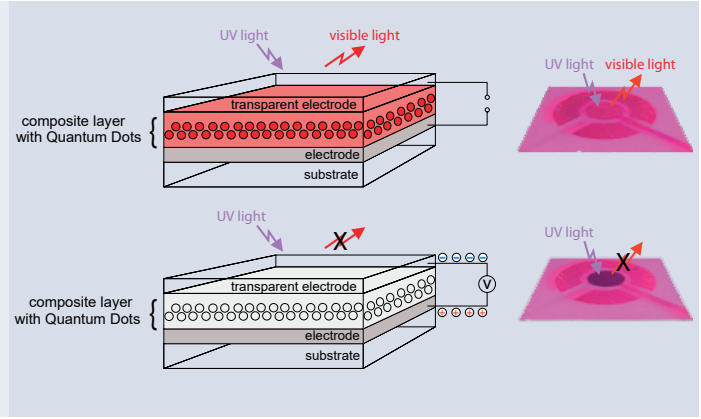

## Contact

### Fraunhofer Institute for Electronic Nano Systems ENAS

Technologie-Campus 3  
09126 Chemnitz, Germany

Prof. Dr. Thomas Otto

Phone: +49 371 45001-231

Email: thomas.otto@enas.fraunhofer.de

Dr. Jörg Martin

Phone: +49 371 45001-244

Email: joerg.martin@enas.fraunhofer.de

### Chemnitz University of Technology

Center for Microtechnologies (ZfM)

Straße der Nationen 62

09111 Chemnitz, Germany

Martin Möbius

Phone: +49 371 531-39461

Email: martin.moebius@zfm.tu-chemnitz.de

Photo acknowledgments: Fraunhofer ENAS

All information contained in this datasheet is preliminary and subject to change. Furthermore, the described system is not a commercial product.

## Principle description

Optical information is a central component for acting in daily life. Therefore, electro-optical transducers offer a wide range of applications for event- and condition monitoring. These transducers based on Quantum Dots detect and store temporarily electrical information without further energy consumption and provide them as an optical information for a certain time. By using an additional force sensitive device, the stored optical information can be used as an indicator of the condition or acted mechanical load on lightweight component. A sensor film based on Quantum Dots, developed by Fraunhofer ENAS in cooperation with the Center for Microtechnologies of the Chemnitz University of Technology, offers the basis for such transducers. In the initial state, UV light is transformed into visible light with a certain initial light intensity (photoluminescence). The transformation process of photoluminescence is prevented by injection of electrical charge carriers into the Quantum Dots via the system of electrodes. As result, the intensity of the visible light is reduced scalable depending on the injected amount of charge carriers.

## Manufacturing technologies

- Thermal evaporation
- Spin coating
- Inkjet printing (DOD)

## Application fields

- Mechanical load detection
- Electro-optical transducer (electromagnetic compatibility, visualization of electrical and magnetic fields)
- Protection against plagiarism, guarantee label
- Passive Display

## Parameter

	typical	unit
Thickness (system of electrodes + nano composites)	250 – 300	nm
Storage time of charge carriers	> 60	h
Electrical charge (for 60 % of the initial light intensity)	< 50	nC/mm <sup>2</sup>
Response time	< 1	ms